


# 648A



ALUMINUM  
铝合金

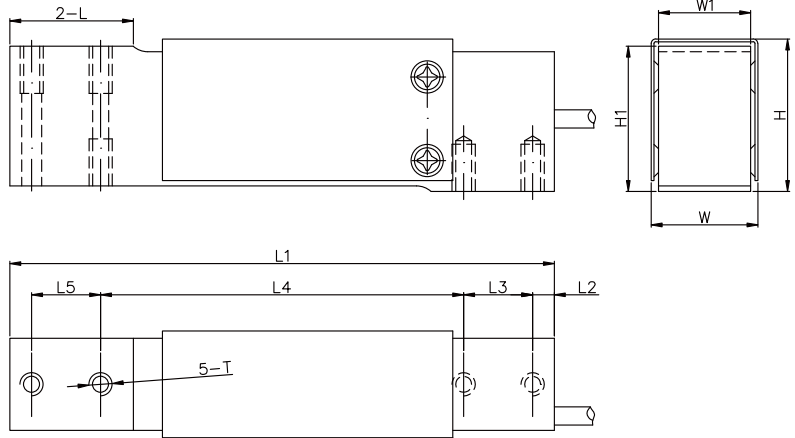

## 尺寸 DIMENSIONS

Rate Capacity  
量程

	L	L1	L2	L3	L4	L5	W	W1	H	H1	T
kg/mm											
10-100	34	150	6	19	100	19	29.4	25.4	42	40	M6深13
lb/inches(conversion of above dimensions 由以上尺寸转换)											
22.04-220.45	1.34	5.91	0.24	0.75	3.9	0.74	1.16	1.00	1.65	1.57	M6DP0.51

## 技术参数 SPECIFICATIONS

Full Scale Output 灵敏度输出	2.0 ± 10% mV/V	Recommended Excitation 使用电压	10V(15V Maximmm)
Zero Balance 零点输出	± 0.02 mV/V	Reference Max.Platform Size 最大秤台尺寸	450*500mm
Nonlinearity 非线性	< ± 0.017%	Insulation Resistance 绝缘阻抗	>2[50V DC]GΩ
Repeatability 重复性	< ± 0.017%	Nominal Temperature Range 工作温度	-10°C to 40°C / 14°F to 104°F
Hysteresis Error 滞后	< ± 0.017%	Safe Overload 安全过载	150% of full scale
Creep in 30 min 30分钟蠕变	< ± 0.023%	Breaking Overload 极限过载	300% of full scale
Input Resistance 输入电阻	405 Ω ± 15	IP Rating 防护等级	IP66
Output Resistance 输出电阻	350 Ω ± 3	Cable Color Code 颜色码	Exc(输入)+:Red(红);Exc(输入)-:Black(黑);Sig(输出)+:Green(绿);Sig(输出)-:Whit(白) Shield Bare(屏蔽)
Element Materia 材质	Aluminum 铝合金		

## 648A

Special Features  
特征

- ◆ 符合OIML认证指标
- ◆ 通常精度可达到C3, 5000分度值
- ◆ 角差修正
- ◆ Ip67防护
- ◆ 铝制外壳
- ◆ 也用于双梁和三梁式
- ◆ Comply with OIML C3
- ◆ High accuracy regulations up to 5000d for Scales class III
- ◆ Off-center load compensated
- ◆ IP67 protection
- ◆ Aluminum shell cover
- ◆ Triple-beam and double-beam is available